


# VITALink® 2 Hour Fire Resistive CIC Cable



## ABOUT VITALink®

VITALink® 2 Hour Fire Resistive CIC cable is designed to survive for 2 hours in a fire when installed in accordance with installation instructions. VITALink® cables are available in 12-18 AWG solid copper conductors and 12-16 AWG stranded copper conductors with shielded and unshielded constructions. Designed for use in critical circuits in fire alarms and emergency systems, VITALink® cable is certified to UL 2196 and CAN/ULC-S139.

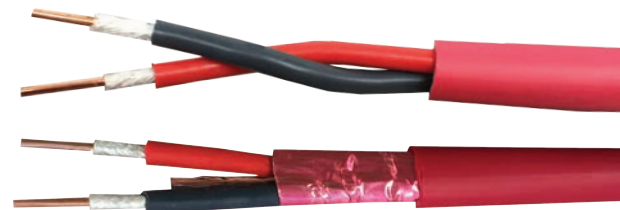

## VITALink® ADVANTAGES

- The best conduit fill rate in the industry
- The best product spectrum
- The longest vertical installation distance
- The most listings and the best ratings

Part Number	½" Max. Conduit Fill	¾" Max. Conduit Fill	1" Max. Conduit Fill	1 ¼" Max. Conduit Fill	1 ½" Max. Conduit Fill	2" Max. Conduit Fill
Shielded						
16 AWG Solid Copper (35785)	-	-	3 Cables	6 Cables	8 Cables	10 Cables
14 AWG Solid Copper (36316)	-	-	3 Cables	5 Cables	6 Cables	10 Cables
Unshielded						
18 AWG Solid Copper (36337)	1 Cable	2 Cables	4 Cables	7 Cables	7 Cables	7 Cables
16 AWG Solid Copper (35777)	1 Cable	2 Cables	3 Cables	6 Cables	8 Cables	10 Cables
16 AWG Stranded Copper (36341)	1 Cable	1 Cable	3 Cables	5 Cables	7 Cables	10 Cables
14 AWG Solid Copper (36338)	1 Cable	1 Cable	3 Cables	5 Cables	7 Cables	10 Cables
14 AWG Stranded Copper (36340)	1 Cable	1 Cable	2 Cables	4 Cables	6 Cables	10 Cables
12 AWG Solid Copper (36342)	1 Cable	1 Cable	2 Cables	4 Cables	6 Cables	10 Cables
12 AWG Stranded Copper (36339)	1 Cable	1 Cable	2 Cables	4 Cables	6 Cables	10 Cables